

ROCKY TUBE

Product sheet
Rocky Tube

V5.0, 2022-01-18

Micropol Fiberoptic AB
Älvdalsvägen 4
313 50 Åled


Phone: +46 (0)35 17 85 39
Mail: info@micropol.com




FEATURES

- Tailor-made
- Bend limiting
- Cable Tie Secure
- 1-24 fiber per tube
- Halogen-free


DRAWING CONSTRUCTION

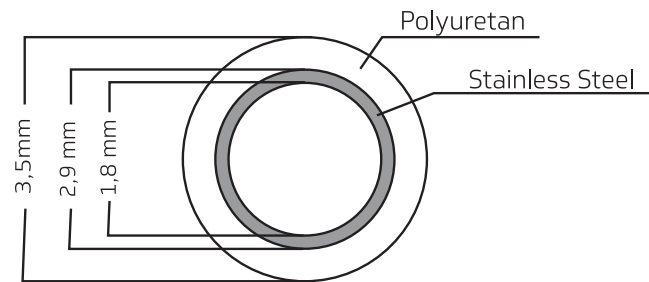

BEND RADIUS



DRAWING STAINLESS STEEL ELEVATION

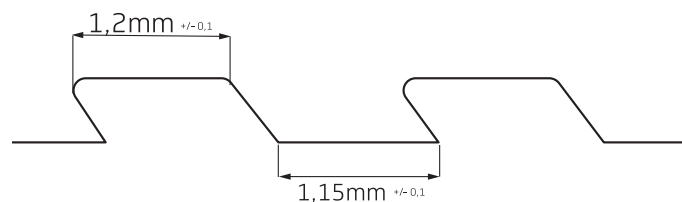

TECHNICAL SPECIFICATION

Product	6876/ ROCKY-2	Tensile strength	490N
Material	Stainless steel & Polyuretan	Radial pressure	1176N/50mm
Outer diameter PU	3,5 mm	Min. bend radius	r = 8,0mm
Outer diameter SS	2,9 mm	Temp. range	-55°C – +120°C
Inner diameter SS	1,8 mm	Fire class	IEC 60332-1-2 + CS-25 BOOK 1
Weight	20g/meter		