

# ADAPTER - LC SIMPLEX/DUPLEX/QUAD

Product sheet  
Adapter LC Simplex/  
Duplex/Quad

V2.0, 2023-04-11

Micropol Fiber optic AB  
Älvdalsvägen 4  
313 50 Åled






Phone: +46 (0)35 17 85 39  
Mail: info@micropol.com

LC adapters are designed for mounting in panels with rectangular cutouts. LC adapters are compact and space saving with ceramic alignment sleeves which provide precision mating for both multimode and single mode applications. The LC adapters use the same panel cut out as a duplex SC adapter but provide twice as many ports.


## FEATURES

- SC Foot print design allows to use the LC Adapter in a SC panel and double the density.
- Premium One piece housing design / no welding point.
- Telcordia, ANSI, TIA/EIA and IEC Compliance.
- SC Foot print type, Senior - Junior type also available.

## TECHNICAL SPECIFICATION

Insertion loss	Typical 0.05
	Max 0.20
Flange	Available with flange and without flange
Colour	 Blue (UPC)  Black  Green (APC)  Aqua  Beige
Sleeve type	Zirconia
Sleeve / Ferrule withdraw force	200gf - 600gf
Operating temp.	-40°C to +75°C
Durability	<0.1dB typical change, 500 matings

LC ADAPTER WITH FLANGE

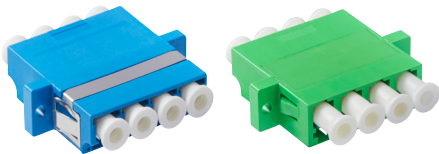

LC ADAPTER WITHOUT FLANGE

